



# KENEX™ GRANO


## HOMOGENEOUS VINYL

**Medson®**




# KENEX™ GRANO

HOMOGENEOUS NON-DIRECTIONAL

 Size: 2.0mm x 2m x 20m




KN-5601 Ice Grey

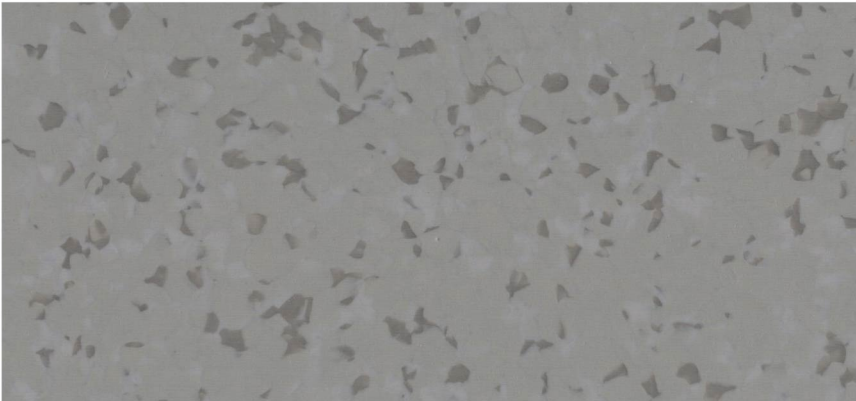


KN-5602 Dark Heather




KN-5603 Vieux Rose

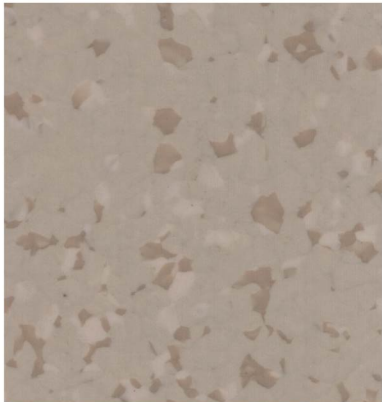


KN-5604 Vandyke Brown

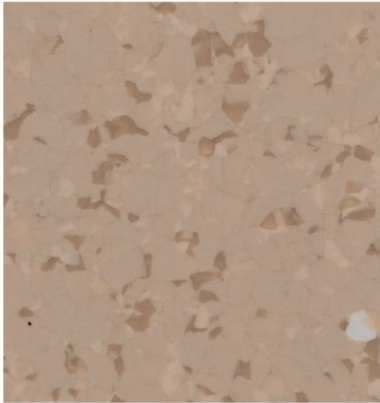


KN-5605 Chestnut

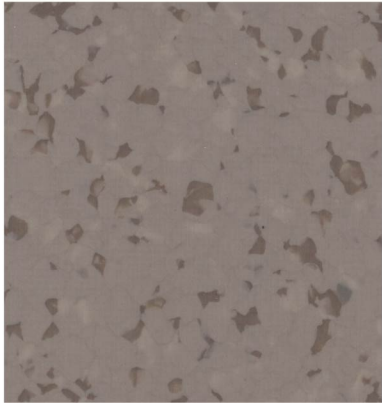

KN-5606 Raw Umber

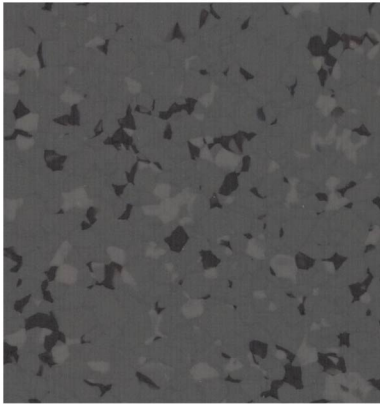

KN-5607 Paynes Gray

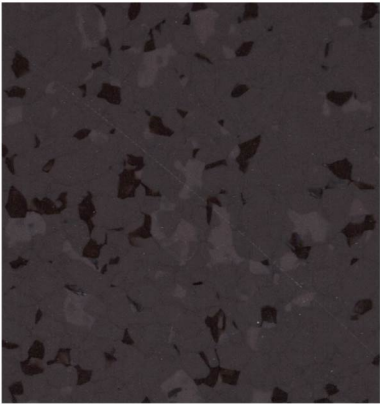

KN-5608 Ivory Black



KN-5609 Lamp Black




KN-5610      Titanium White



KN-5611      Natural



KN-5612      Moon Light

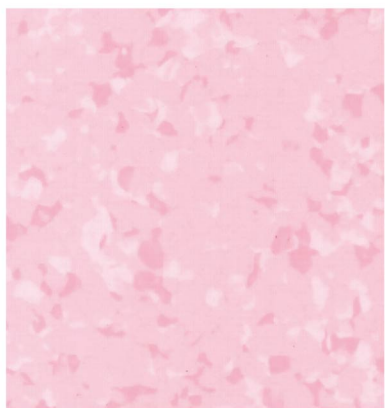


KN-5613      Bubblegum



KN-5614      Lemon Yellow



KN-5615      Pearl

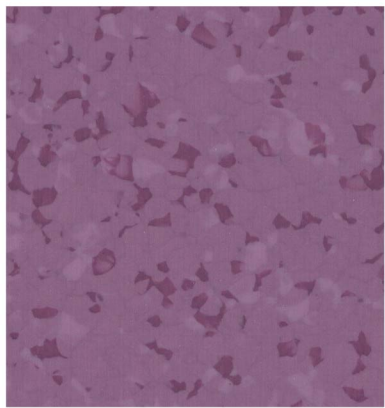

KN-5616      Grape



KN-5617      Gamboge



KN-5618      Coral




KN-5619      Incarnadine




# KENEX™ GRANO

HOMOGENEOUS NON-DIRECTIONAL


 Size: 2.0mm x 2m x 20m




KN-5620      Gray Blue

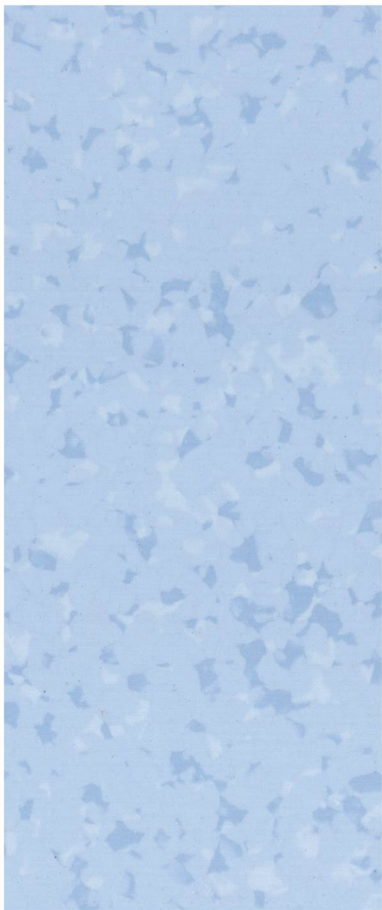


KN-5623      Water Blue

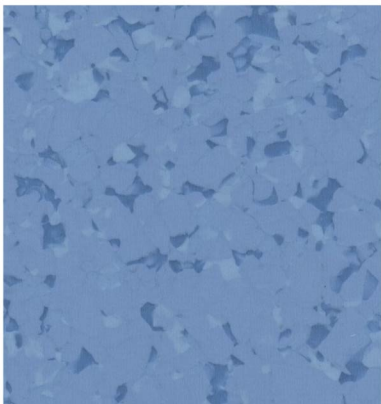

KN-5621      Neon Blue

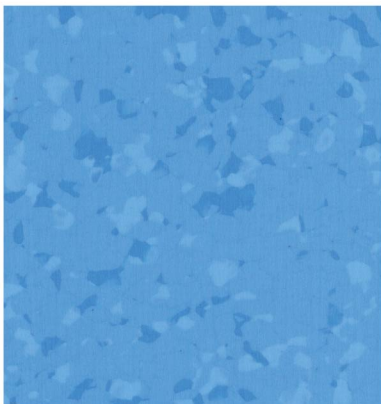


KN-5622      Royal Blue

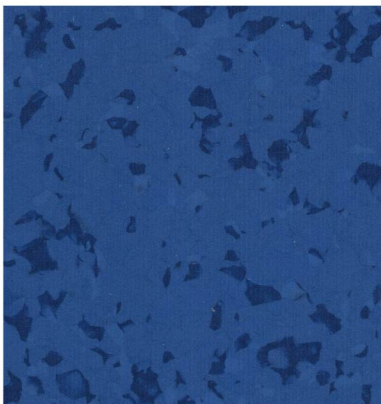


KN-5624      Cornflower Blue



KN-5625      Mint

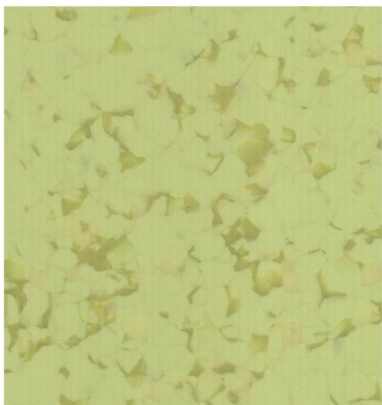

KN-5626      Moss Green

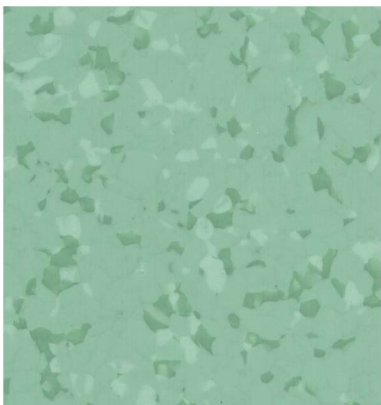


KN-5627      Pale Green



KN-5628      Neon Green



KN-5629      Artichoke Green

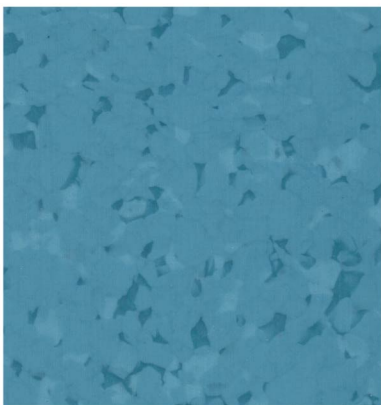

KN-5630      Aquamarine





**Kenex™ Grano** is designed for diverse application areas, offering healthy, hygienic solutions through advanced production technology. Extensive color and design options meet all potential requirements of dynamics in a building. Its durable surface finish resists chemicals, scratches, and stains for easy maintenance, while eco-friendly manufacturing ensures low emissions and phthalate-free materials, supporting healthier indoor environments.



Stain Resistance



Scratch Resistance




Wear Resistance



Ultra Matte

# KENEX™ GRANO

## HOMOGENEOUS VINYL

DESCRIPTION	STANDARD	UNIT	RESULT
Type of floor covering	ISO 10581 / EN 649	-	Homogeneous Vinyl Flooring
Total thickness	ISO 24346 / EN 428	mm	2
Width of sheet	ISO 24346 / EN 426	m	2
Length of sheet	ISO 24346 / EN 426	m	20
CLASSIFICATION			
European classification	ISO 10784 / EN 685	class	34-43
Reaction to fire	EN 13501 - 1	class	Bfl-s1
	GB 8624 - 2012	-	B1(B-s1,t0)
Toxic testing	GB 18586 - 2001	-	Qualified
Static electrical propensity	EN 1815	KV	≤2
Slip resistance	DIN 51130	class	R9
PERFORMANCES			
Type binder content	ISO 10581 / EN 649	type	I
Dimensional stability	ISO 23999 / EN 434	%	≤0.4
Residual indentation	ISO 24343-1 / EN 425	mm	≤0.1 ( ≈0.05 )
Flexibility	ISO 24344 / EN 435	-	No Cracking
Thermal conductivity	ISO 10456 / EN 12524	W/(m.k)	≈0.25
Castor chair test	ISO 4918 / EN 425	-	OK
Colour fastness to light	ISO 105 - B02	degree	≥6
Chemical resistance	ISO 26987 / EN 423	-	Very good
Bacteria resistance	ISO 846 - 2019	-	Does not support growth
Surface treatment	MaxShield™		
Logistics information	<div><div>2mx20mx2.0mm</div><div>16 Rolls/Pallet</div><div>10Pallets/6400m²</div></div>		

ADVANTAGES

Eco-Friendly

Easy Maintenance

Super Wear-resistant

Anti-slip

Sound Absorbing

Anti-bacterial

Anti-iodine (customized)

APPLICATION

Healthcare

Education

Offices

Shopping Malls

Transportation

Factories

\*Minumum order quantity : 500 SQM per decor

\*The sample is only used as a reference for color selection. The color may slightly different from the actual samples.

\*The above technical parameters are typical test results under laboratory standard test conditions.

\*If you have special requirements for a certain technical parameter, please discuss the specific details with our company when ordering.

